

MEGA TITAN-48 UPS



MEGA TITAN-48V

Introducing the Mega Titan 48V UPS! Designed for outdoor or indoor deployments for MDU or business ONTs. The Mega TITAN provides a continuous –48V of UPS power including ONT alarms placed on a CAT-5 connection for easy field termination. Our field proven battery management system ensures long life and reliable power in harsh environments.

- · -48V @ 150W
- · 10 Year design-life GS Battery.
- 10 to 12-hour runtime with typical 150W rated ONTs.
- Automatic 45-day battery testing.
- · Temp compensated battery charging.
- · Powder Coated Steel enclosure
- Designed and Manufactured in the USA!





MEGA TITAN-48

Outdoor UPS Specifications

Input

AC Input Voltage 90V - 305Vac AC Input Frequency 47/63 Hz Plug Type Cable Lenth 3 prong grounded

DC Output

150 watts Power Voltage 45V - 50V

2 position screw terminal Connector Battery On Battery Low Alarms Battery Fail Battery Missing

Battery

Lead acid Type

GS Battery PYL12V80TT Model Capacity

80Ah

Physical

Dimensions 16"H x 12"W x 8"D (in./approx) Weight

75 lbs. 12AWG Power Cable

Cat-5 connection Alarms Mounting Options Wall or pole mount

Environment

-40°C to +55°C (-40°F to + 131°F) Operating Temperature Operating Humidity 0% to 95% non condensing


Safety Compliance

Specification: EN-60950-1 EN-60950-2

Emissions: FCC 47 CFR Part 15 Class B

Warranty 3 years



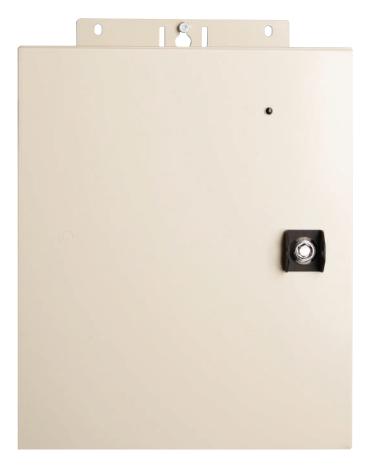

Bold indicates industry-best



Specifications subject to change without notice